



## TO-263 Package Outline Dimensions

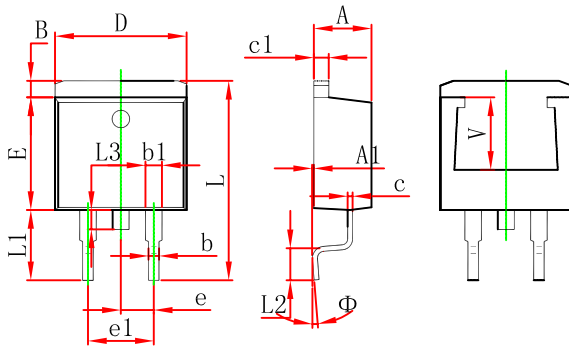

| Symbol | Dimensions in Millimeters |        | Dimensions in Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min.                      | Max.   | Min.                 | Max.  |
| A      | 4.470                     | 4.670  | 0.176                | 0.184 |
| A1     | 0.000                     | 0.150  | 0.000                | 0.006 |
| B      | 1.120                     | 1.420  | 0.044                | 0.056 |
| b      | 0.710                     | 0.910  | 0.028                | 0.036 |
| b1     | 1.170                     | 1.370  | 0.046                | 0.054 |
| c      | 0.310                     | 0.530  | 0.012                | 0.021 |
| c1     | 1.170                     | 1.370  | 0.046                | 0.054 |
| D      | 10.010                    | 10.310 | 0.394                | 0.406 |
| E      | 8.500                     | 8.900  | 0.335                | 0.350 |
| e      | 2.540 TYP.                |        | 0.100 TYP.           |       |
| e1     | 4.980                     | 5.180  | 0.196                | 0.204 |
| L      | 14.940                    | 15.500 | 0.588                | 0.610 |
| L1     | 4.950                     | 5.450  | 0.195                | 0.215 |
| L2     | 2.340                     | 2.740  | 0.092                | 0.108 |
| L3     | 1.300                     | 1.700  | 0.051                | 0.067 |
| Φ      | 0°                        | 8°     | 0°                   | 8°    |
| V      | 5.600 REF.                |        | 0.220 REF.           |       |

## TO-263 Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.